


# 1" Elima-Matic Bolted Metal

with Non-Metallic Center Sections

# E1

## Performance

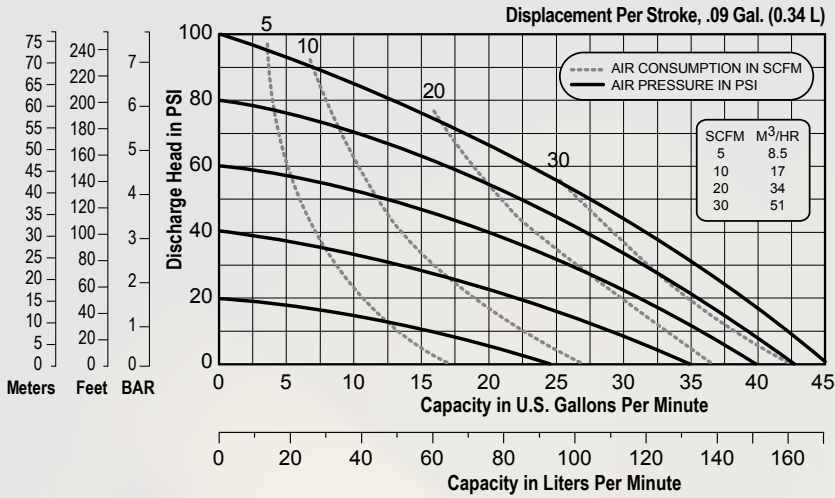

**NOTE:** Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

## Specifications

### Flow Rate

Adjustable to . . . . . 0-46 gpm (174.1 lpm)

### Port Size

Suction . . . . . 1" NPT

Discharge . . . . . 1" NPT

**Air Inlet** . . . . . 3/8" NPT

**Air Exhaust** . . . . . 1/2" NPT

### Suction Lift

Dry . . . . . 16' (4.9 m)

Wet . . . . . 31' (9.4 m)

### Max Solid Size (Diameter)

. . . . . 1/8" (3.2 mm)

### Max Noise Level

. . . . . 93 dB(A)

### Shipping Weights

Aluminum . . . . . 22 lbs (10 kg)

Stainless Steel . . . . . 36 lbs (16.3 kg)

Alloy C . . . . . 36 lbs (16.3 kg)

## Dimensions

