


# 1 1/2" Elima-Matic Clamped Metallic with Metallic Center Section

# E4

## Performance

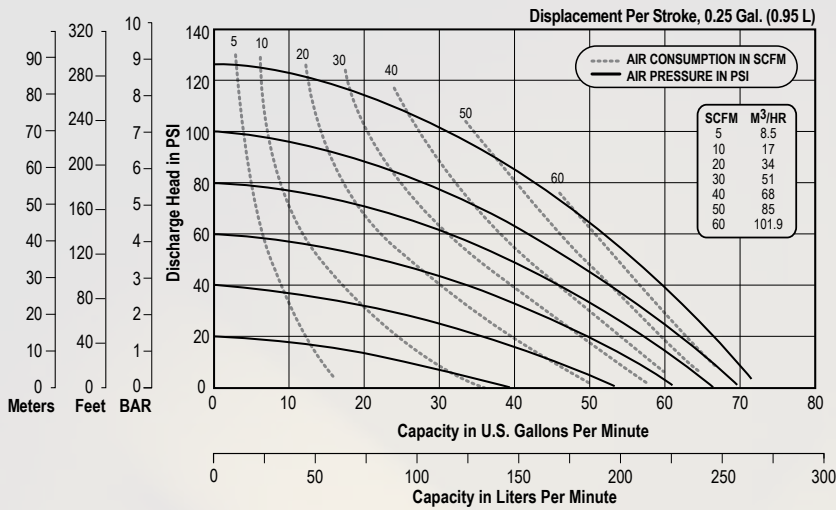

**NOTE:** Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

## Specifications

### Flow Rate

Adjustable to . . . . . 0-71 gpm (268 lpm)

### Port Size

Suction . . . . . 1 1/2" NPT

Discharge . . . . . 1 1/4" NPT

Air Inlet . . . . . 1/2" NPT

Air Exhaust . . . . . 3/4" NPT

### Suction Lift

Dry . . . . . .19' (5.8 m)

Wet . . . . . .31' (9.4 m)

### Max Solid Size (Diameter)

. . . . . 3/16" (4.76 mm)

### Max Noise Level . . . . . 101 dB(A)

### Shipping Weights

Aluminum . . . . . 55 lbs (25 kg)

Cast Iron . . . . . 95 lbs (43 kg)

Stainless Steel . . . . . 92 lbs (42 kg)

## Dimensions

