


1 1/2" Elima-Matic Bolted with Metallic Center Section

E4

Performance

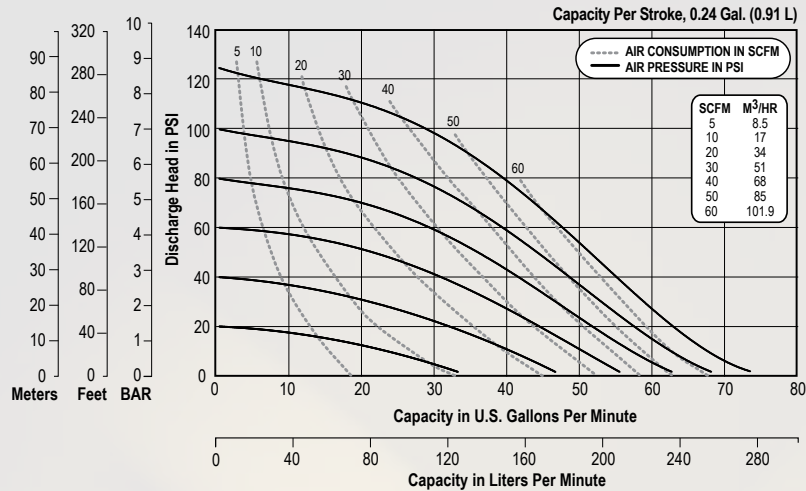

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

Specifications

Flow Rate

Adjustable to 0-73 gpm (276 lpm)

Port Size

Suction 1 1/2" Flange

Discharge 1 1/2" Flange

Air Inlet 1/2" NPT

Air Exhaust 3/4" NPT

Suction Lift

Dry 15' (4.6 m)

Wet 25' (7.6 m)

Max Solid Size (Diameter)

. 3/16" (4.76 mm)

Shipping Weights

Stainless Steel65 lbs (29.5 kg)

Dimensions

