2” Elima-Matic Flap Valve – ATEX

with Metallic Center Section

E2

Performance

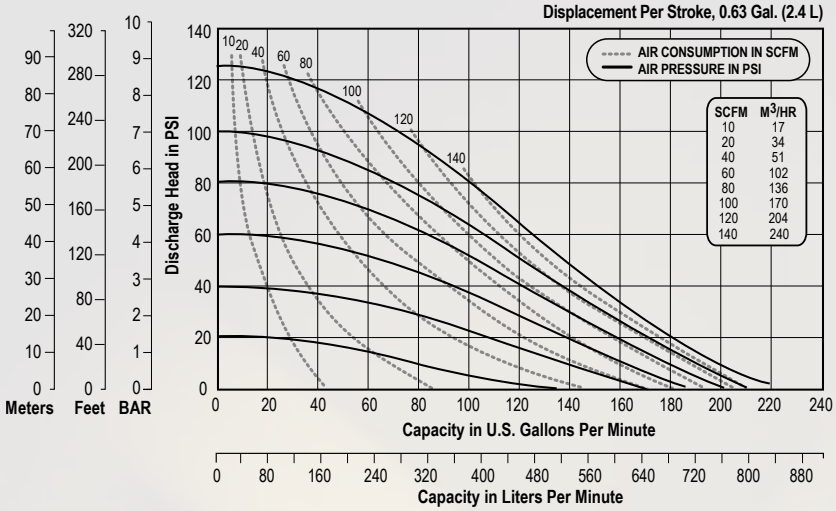

NOTE: *Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.*

Specifications

Flow Rate
Adjustable to ..... 0-219 gpm (829 lpm)
Port Size
Suction ..... 2" NPT
Discharge ..... 2" NPT
Air Inlet ..... 1/2" NPT
Air Exhaust ..... 1" NPT
Suction Lift
Dry ..... 11' (3.4 m)
Wet ..... 26' (7.9 m)
Max Solid Size (Diameter)
..... 1 1/8" (28.6 mm)
Max Noise Level ..... 95 dB(A)
Shipping Weights
Aluminum ..... 84 lbs (38.1 kg)

Dimensions

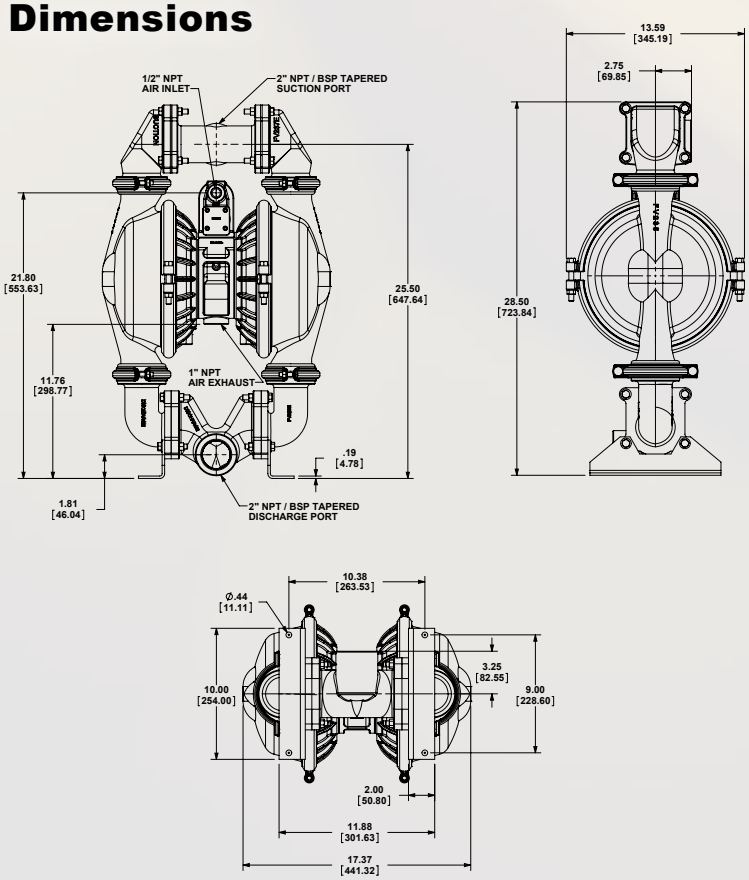

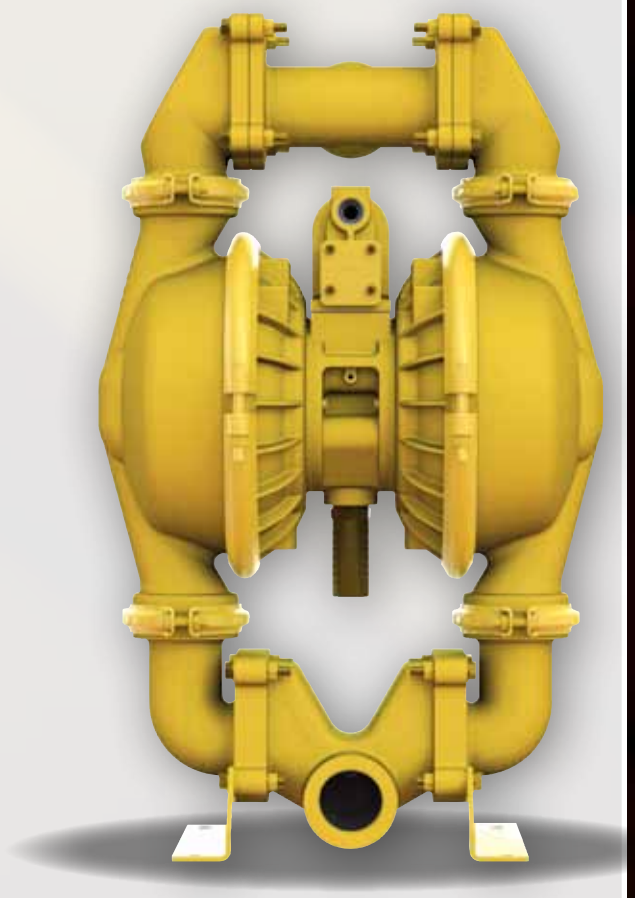

VERSA-MATIC®

Warren Rupp, Inc. • A Unit of IDEX Corporation
800 North Main Street, Mansfield, OH 44902 USA
Phone: 419.526.7296 • Fax: 419.526.7289 • www.versamatic.com