

E8 SPECIFICATIONS AND PERFORMANCE

Versa-Matic Mini-Matic Model MM 3/8" Bolted Plastic Pump

Flow Rate

Adjustable to 0-6.8 gpm (26 lpm)

Port Size

Suction 3/8" Female NPT (BSP)

Discharge 3/8" Female NPT (BSP)

Air Inlet 0.25" Female NPT

Air Exhaust 0.25" Female NPT

Suction Lift 11' (3.4 m) Dry

Teflon 11' (3.4 m) Dry

Max. Particle Size (Dia.) 0.10" (2.25 mm)

dB(A) Reading 78 dB(A)


Shipping Weight

Polypropylene 3 lbs (1.4 kg)

Kynar 3 lbs (1.4 kg)

**Caution: do not exceed 100 psig
(6.8 bar) liquid or air supply pressure.**

Displacement Per Stroke, 0.0045 Gal. (0.017 L)

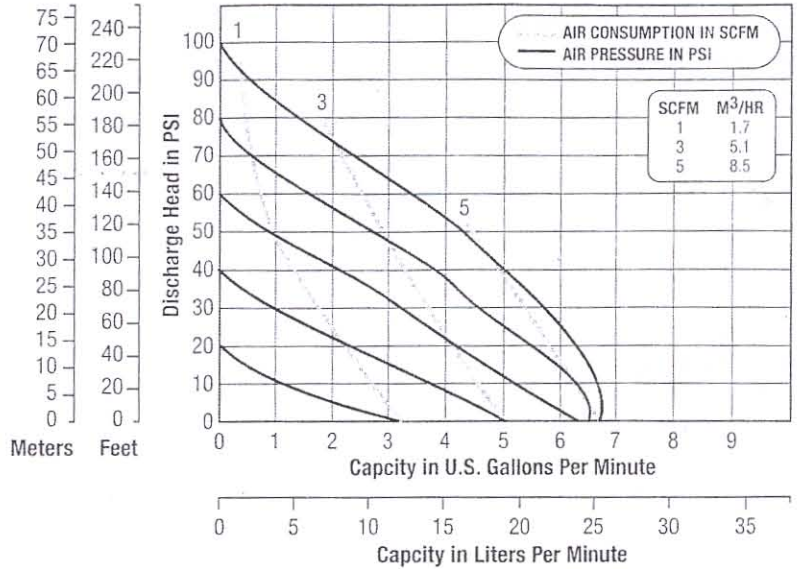

E8 3/8" Bolted Plastic Pump

