


# 1/4" Elima-Matic Bolted Plastic with Non-Metallic Center Sections

# E6

## Performance

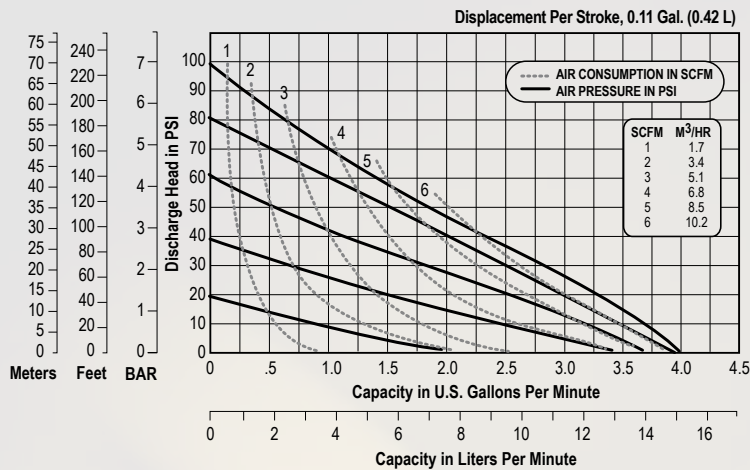

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

## Specifications

### Flow Rate

Adjustable to . . . . . 0-4 gpm (15 lpm)

### Port Size

Suction . . . . . 1/4" NPT (BSP)

Discharge . . . . . 1/4" NPT (BSP)

**Air Inlet** . . . . . 1/4" NPT

**Air Exhaust** . . . . . 1/4" NPT

### Suction Lift

Dry . . . . . 8' (2.44 m)

### Max Solid Size (Diameter)

. . . . . 1/32" (1 mm)



**Max Noise Level** . . . . . 78 dB(A)

### Shipping Weights

Polypropylene . . . . . 3 lbs (1.40 kg)

Kynar . . . . . 4.5 lbs. (2.04 kg)

## Dimensions

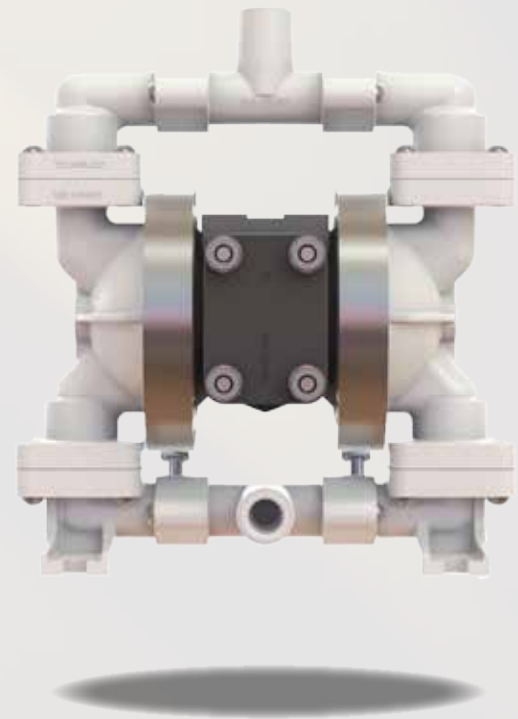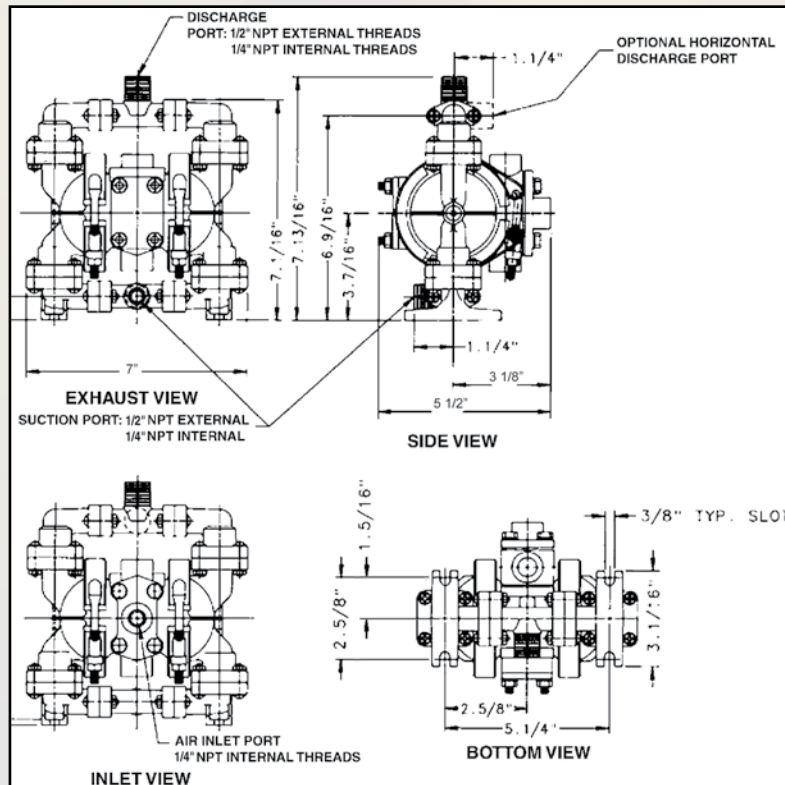

EAC CE

**VERSA-MATIC**

Warren Rupp, Inc. • A Unit of IDEX Corporation  
800 North Main Street, Mansfield, OH 44902 USA  
Phone: 419.526.7296 • Fax: 419.526.7289 • [www.versamatic.com](http://www.versamatic.com)

e6nmdlCsm-rev0817