


# 3" Elima-Matic Clamped Metallic - ATEX

with Metallic Center Section

# E3

## Performance

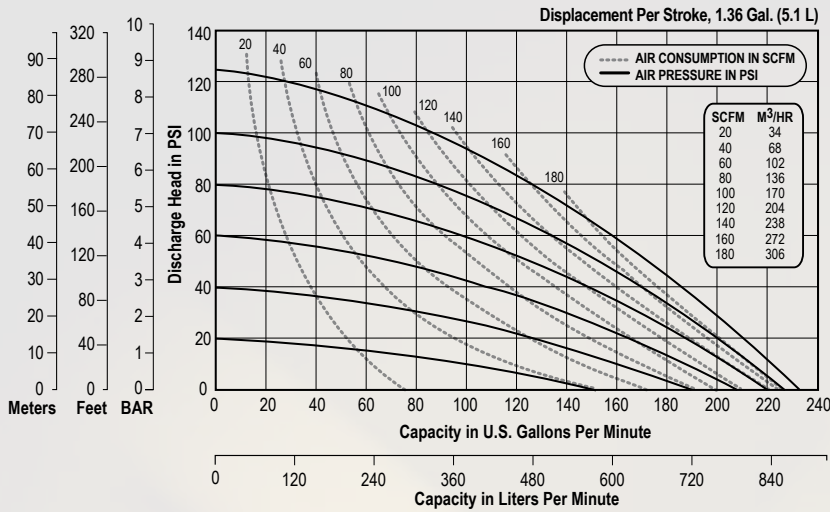

**NOTE:** Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

## Specifications

- Flow Rate**  
Adjustable to . . . . . 0-234 gpm (886 lpm)
- Port Size**  
Suction . . . . . 3" NPT (BSP)  
Discharge . . . . . 3" NPT (BSP)
- Air Inlet** . . . . . 1/2" NPT
- Air Exhaust** . . . . . 1" NPT
- Suction Lift**  
Dry . . . . . .20' (6.1 m)  
Wet . . . . . .32' (9.8 m)
- Max Solid Size (Diameter)**  
. . . . . 3/8" (9.5 mm)
- Max Noise Level** . . . . . 96 dB(A)
- Shipping Weights**  
Aluminum . . . . . 108 lbs (49.0 kg)  
Cast Iron . . . . . 205 lbs (93 kg)  
Stainless . . . . . 183 lbs (83 kg)  
\*\* Stainless Center add . . . . 50 lbs. (22.7 kg)

## Dimensions

