


3" Elima-Matic Bolted Aluminum - ATEX

with Metallic Center Section

E3

Performance

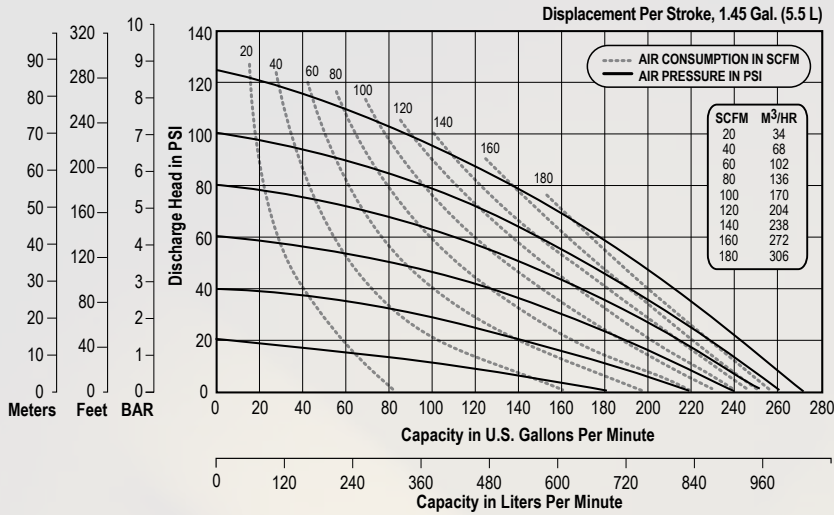

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

Specifications

E3 3" Bolted Aluminum Rubber and TPE Fitted - Rugged

Flow Rate

Adjustable to 0-273 gpm (1,033 lpm)

Port Size

Suction 3" ANSI 150 lbs. Class (DIN80)

Discharge 3" ANSI 150 lbs. Class

Air Inlet 1/2" NPT

Air Exhaust 1" NPT

Suction Lift

Dry 16' (4.9 m)

Wet 31' (9.4 m)

Max Solid Size (Diameter)

. 3/8" (9.5 mm)

Max Noise Level 93 dB(A)

Shipping Weights

Aluminum 146 lbs. (66.2 kg)

Dimensions

